


CAM FOLLOWERS


MINIATURE TYPE
HEXAGON SOCKET ON STUD HEAD



CFS..A



CFS..VA

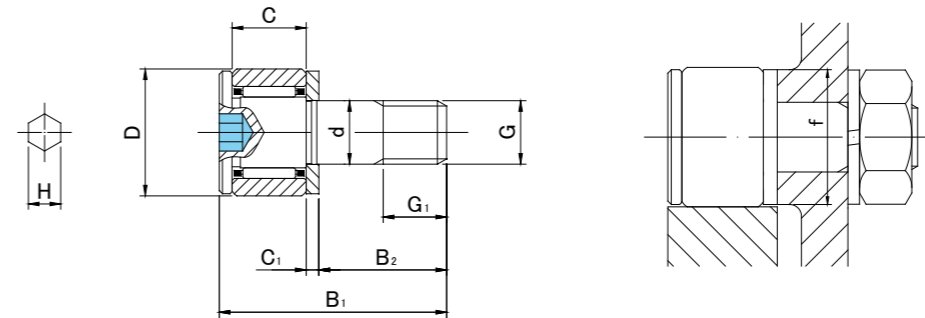

CFS..A TYPE

Prepacked Grease

Stud diameter (mm)	Designation	Dimensions (mm)											Basic dynamic load rating	Basic static load rating	Largest permissible load	Max tightening torque	Mass
		Cylindrical outer ring		D	C	d	G	G1	B1	B2	C1	H					
h6 tolerance	With cage	Full roller															
2.5	CFS 2.5A	—	5	3	2.5	M2.5×0.45	2.5	9.5	5	0.7	0.9	4.8	410	335	260	0.2	1
	0 -0.006	—											CFS 2.5VA	1 000	1 080		
3	CFS 3A	—	6	4	3	M3×0.5	3	11.5	6	0.7	1.5	5.8	630	610	360	0.3	2
	0 -0.006	—											CFS 3VA	1 370	1 770		
4	CFS 4A	—	8	5	4	M4×0.7	4	15	8	1	2	7.7	1 080	1 080	780	0.6	4
	0 -0.008	—											CFS 4VA	2 350	3 040		
5	CFS 5A	—	10	6	5	M5×0.8	5	18	10	1	2.5	9.6	1 570	1 860	1 420	1.3	7
	0 -0.008	—											CFS 5VA	3 140	4 710		
6	CFS 6A	—	12	7	6	M6×1	6	21.5	12	1.2	3	11.6	2 060	2 160	2 110	2.3	13
	0 -0.008	—											CFS 6VA	4 610	6 270		

OUTER RINGS TOLERANCE (μm)

TYPE	Cylindrical outer ring
CFS2.5,CFS3,CFS4,CFS5,CFS6	0/-8

ACCESSORIES

TYPE	
All types	NUT Attached